


DETAIL "E" CROSSBARS

CROSSBARS AND EDGE RAILS ARE STANDARD 1.375" (34mm) OD GALVANIZED CHAIN LINK FENCE TOP RAIL WITH SPIGOTTED ENDS. ALL CUT ENDS TO BE PAINTED WITH ZINC BASED PAINT. EXAMPLE "GALVACON"

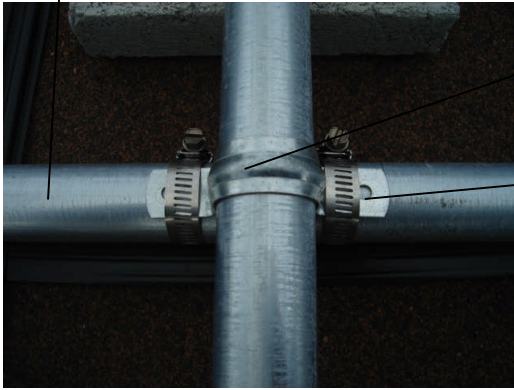


GALVANIZED TWO HOLE CONDUIT CLAMP FOR 1" (25mm) EMT CONDUIT. NOTE: DO NOT USE ELECTRICAL CONDUIT, JUST CONDUIT CLAMP.

SECURE CONDUIT CLAMP AROUND EDGE BAR USING #16 ALL SS GEAR CLAMP

GLUE STRIPS SHOULD BE USED TO KEEP POWERSTRIP MATERIAL ARRANGED. SEE POWERSTRIP INSTALLATION MANUALS AND WEB SITE WWW.H2OTSUN.COM
 GLUE STRIPS ARE 2 TUBE WIDE POWERSTRIPS TUBE SIDE DOWN ON ROOF GLUED TO POWERSTRIPS WITH LEPAGES PL PREMIUM CONSTRUCTION MASTIC

CROSSBARS FRAME THE PERIMETER OF THE 4' (1200mm) WIDE SCREEN MESH THAT CONTAINS THE GRAVEL BALLAST.. SEE DETAIL C. ..

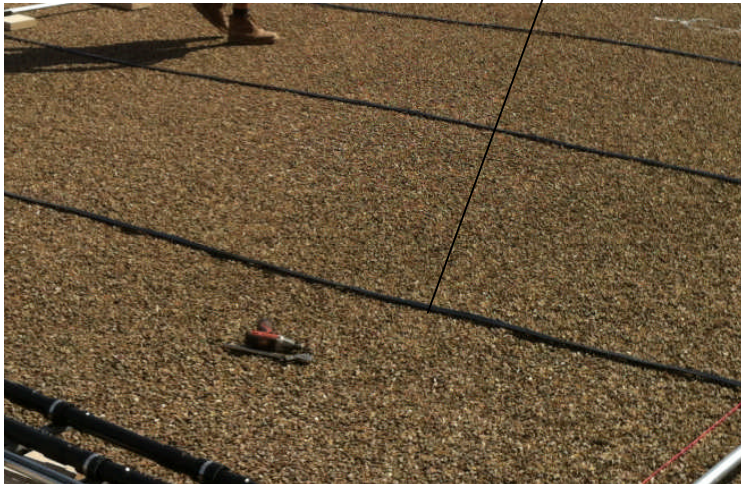

HOT SUN INDUSTRIES LTD.
 Burnaby BC Canada
 778-300-1803

FLAT ROOF MOUNTING

CROSSBAR CONNECTION TO EDGE RAIL DETAIL POWERSTRIP PG135 SOLAR COLLECTORS

ECH/SC		NO. DESSIN / DWG NO.	GR/SIZE
DATE	SEPT 29, 2012	DWG BON 10 E	
PAR/BY	KEN WRIGHT		
VER/CHK			